


Westinghouse




High Voltage Power Fuses
Indoor Current Limiting

Types BAL-1, CLV and CLE-PT Non-Indicating Fuses



600 Volt and 850 Volt Dc, 600 Volt to 2400 Volt, 1/2 to 20 Amperes

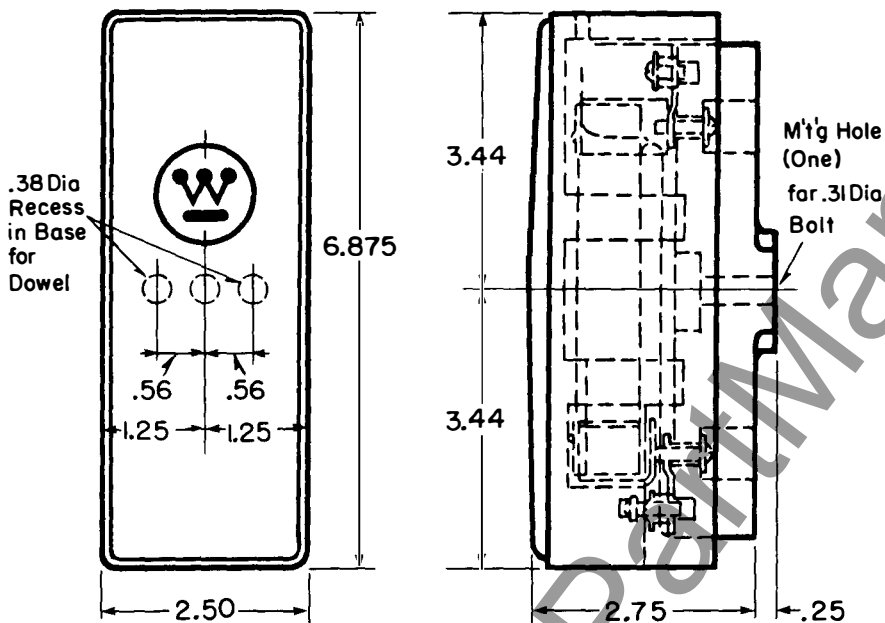


Type BAL-1 Mounting, S#365022

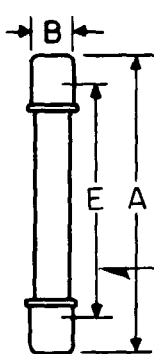


Line No.	Fuse Type	Nominal Voltage	Dimensions, Inches			Fuse Mounting Style No.
			A	B	E	
1	BAL-1	600 dc	4.625	.81	4.0	365022
2	BAL-1	850 dc	6.625	.81	6.0	△
3	CLV	600	4.625	.81	4.0	365022
4	CLE-PT	2400	4.625	.81	4.0	365022
5	CLE-PT	4800	5.625	.81	5.0	△
6	CLE-PT	4800-2E	5.625	.81	5.0	△
7	CLE-PT	7200	8.000	.81	7.38	△



△ Fuse clips only available, S#42518.

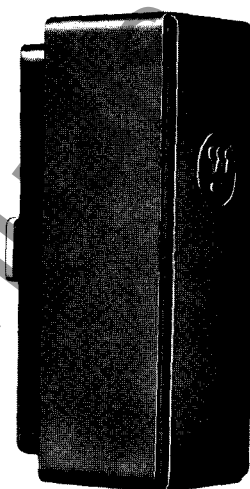

Fuse mounting with cover in place.

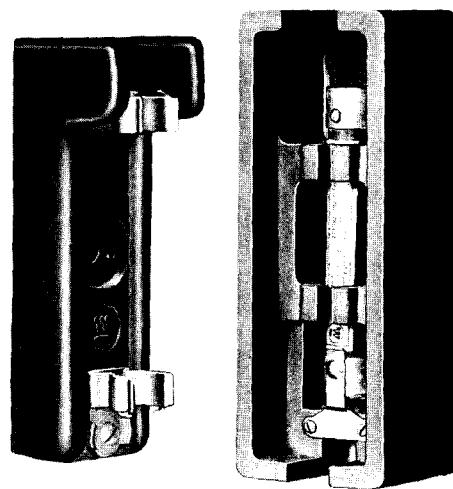

Base

Cover

Mounting open to show fuse supported in cover.

Customer _____ Address _____ G. O. _____

P.O. Number _____ Item _____ Approval

Apparatus _____ Construction

Line No. _____ Certified _____ Date _____ Other

Westinghouse Electric Corporation
Switchgear Division, Power Switching Equipment, East Pittsburgh, Pa.
Printed in USA


August, 1968
Supersedes TCS 36-671, page 1, dated August, 1967
E. D/1971/DB

Westinghouse



High Voltage Power Fuses
Indoor Current Limiting

Disconnecting, Types CLE-PT, CLE, CLE-1, CLE-11, CLE-12, CLE-2, CLE-21, CLE-22
2400 to 23000 Volts, 1/2 to 450 Amperes

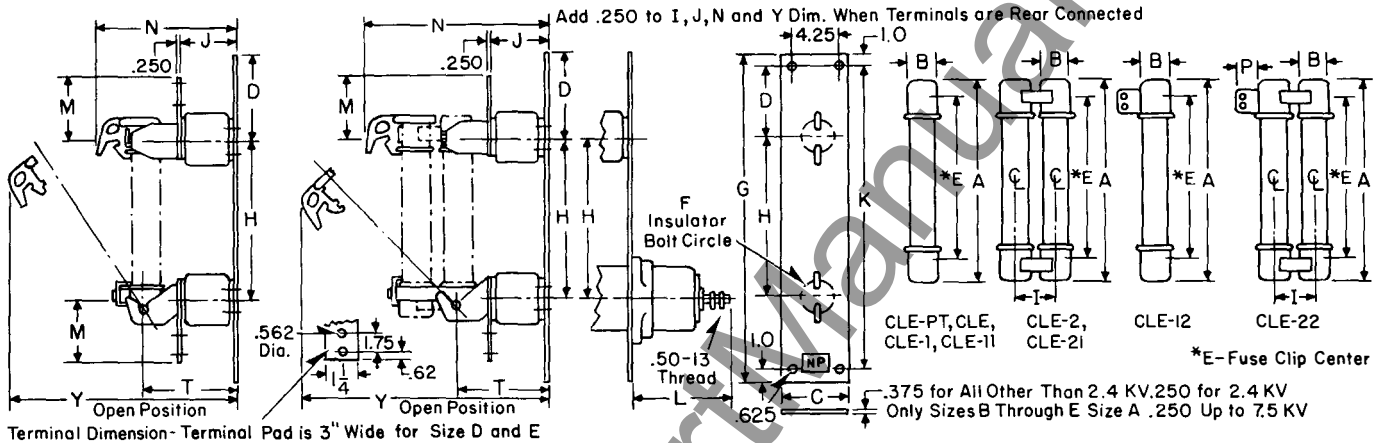

Line No.	Nominal Fuse Voltage Rating	Nominal Insulating Voltage Rating	Mounting Size	Fuse Dimensions, Inches				Mounting Dimensions, Inches							Base Dimensions, Inches					Recom. Phase Spacing, Inches		
				A	B	E	I	P	H	T	J	L	M	N	Y	C	D	F	G		H	K
1	2400	4800	C	9.50	2.00	8.13			8.13	5.81	3.75	8.56	5.13	9.25	15.38	6.0	7.50	2.0	23.0	8.13	21.0	8.0
2			D	10.88	3.00	7.00			7.00	6.84	3.75	8.56	5.50	11.09	16.38	6.0	7.50	2.0	22.0	7.00	20.0	9.0
3			E	10.88	3.00	7.00	3.56		7.00	6.88	3.75	8.56	5.50	14.69	17.62	6.0	7.50	2.0	22.0	7.00	20.0	9.0
4	4800	4800	A	9.50	1.63	8.13			8.13	5.69	3.75	8.56	5.13	9.06	15.00	6.0	7.50	2.0	23.0	8.13	21.0	8.0
5			B	9.50	1.63	8.13			8.13	5.69	3.75	8.56	5.38	9.06	15.00	6.0	7.50	2.0	23.0	8.13	21.0	8.0
6			C	12.88	2.00	11.50			11.50	5.94	3.88	8.56	5.13	9.38	18.50	6.0	7.50	2.0	27.0	11.50	25.0	9.0
7			D	17.88	3.00	14.00			14.00	6.97	3.88	8.56	5.50	11.22	22.62	6.0	7.50	2.0	29.0	14.00	27.0	10.0
8			E	17.88	3.00	14.00	3.56		14.00	7.00	3.88	8.56	5.50	14.81	23.88	6.0	7.50	2.0	29.0	14.00	27.0	10.0
9		7200	D	17.88	3.00	14.00			14.00	7.97	4.88	9.50	5.50	12.22	23.62	6.0	7.50	2.0	29.0	14.00	27.0	12.0
10			E	17.88	3.00	14.00	3.56		14.00	8.00	4.88	9.50	5.50	15.81	24.88	6.0	7.50	2.0	29.0	14.00	27.0	12.0
11	7200	7200	A	9.50	1.63	8.13			8.13	6.69	4.75	9.62	5.13	10.06	16.00	6.0	7.50	2.0	23.0	8.13	21.0	10.0
12			B	12.88	1.63	11.50			11.50	6.69	4.88	9.50	5.38	10.06	19.00	6.0	7.50	2.0	27.0	11.50	25.0	10.0
13			C	15.50	2.00	14.00			14.00	6.94	4.88	9.50	5.13	10.50	21.75	6.0	7.50	2.0	29.0	14.00	27.0	10.0
14			D	17.88	3.00	14.00			14.00	7.97	4.88	9.50	5.50	12.22	23.62	6.0	7.50	2.0	29.0	14.00	27.0	12.0
15			E	17.88	3.00	14.00			14.00	8.00	4.88	9.50	5.50	15.81	24.88	6.0	7.50	2.0	29.0	14.00	27.0	12.0
16	14400	13800	A	12.88	1.63	11.50			11.50	8.31	6.38	11.25	5.13	11.69	20.50	6.0	7.50	2.0	27.0	11.50	25.0	11.0
17			B	17.50	1.63	16.13			16.13	8.31	6.38	11.25	5.38	11.69	24.50	6.0	7.50	2.0	31.0	16.13	29.0	11.0
18			C	21.50	2.00	20.00			20.00	8.44	6.38	11.25	5.13	12.00	28.25	6.0	7.50	2.0	35.0	20.00	33.0	12.0
19			D	23.88	3.00	20.00			20.00	9.47	6.38	11.25	5.50	13.72	30.50	6.0	7.50	2.0	35.0	20.00	33.0	13.0
20	14400	14400	A	12.88	1.63	11.50			11.50	9.81	7.88	12.88	5.13	13.19	22.00	6.0	7.50	2.0	27.0	11.50	25.0	13.0
21			B	17.50	1.63	16.13			16.13	9.81	7.88	12.88	5.38	13.19	26.00	6.0	7.50	2.0	31.0	16.13	29.0	13.0
22			C	21.50	2.00	20.00			20.00	9.94	7.88	12.88	5.13	13.50	29.75	6.0	7.50	2.0	35.0	20.00	33.0	13.0
23			D	23.88	3.00	20.00			20.00	10.97	7.88	12.88	5.50	15.22	32.00	6.0	7.50	2.0	35.0	20.00	33.0	15.0
24			E	23.88	3.00	20.00	3.56		20.00	11.00	7.88	12.88	5.50	18.81	33.88	6.0	7.50	2.0	35.0	20.00	33.0	15.0
25	23000	23000	A	17.50	1.63	16.13			16.13	13.06	11.12	16.00	5.88	16.44	29.38	7.0	8.50	3.0	33.0	16.13	31.0	17.0
26	23000	23000	A	17.50	1.63	16.13			16.13	13.06	11.12	16.00	5.88	16.44	29.38	8.0	(with rear connected studs)					17.0
27	2.4/4.8 kv		None	15.88	3.00	12.00			1.25													
28	2.4/4.8 kv		None	15.88	3.00	12.00	3.31		1.25													

Customer _____ Address _____ G. O. _____

P.O. Number _____ Item _____ Approval

Apparatus _____ Reference

Line No. _____ Certified _____ Date _____ Construction

Other