



18738600-412

Figure C

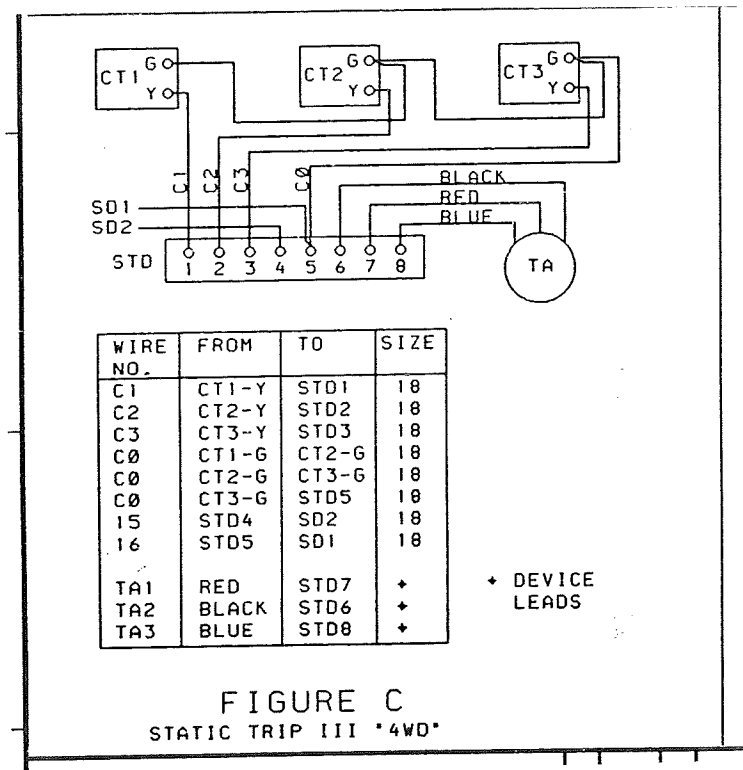

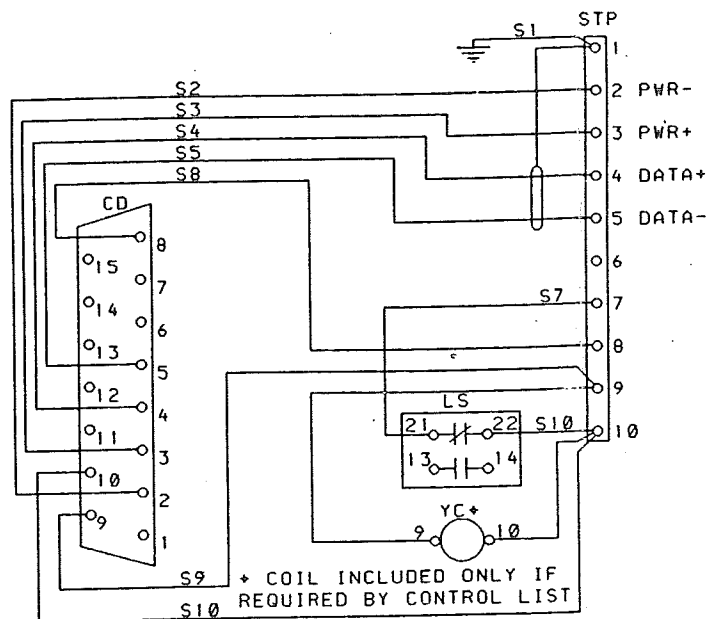

WIRE NO.	FROM	TO	SIZE	
S1	STP-1	FRAME	18	
S2	STP-2	CD-2	22	
S3	STP-3	CD-3	22	
S1	STP-1	SHIELD	++	++ WIRE SHIELD
S4	STP-4	CD-4	BLACK	} SHIELDED TWISTED PAIR
S5	STP-5	CD-5	WHITE	
S7	STP-7	LS-21	22	
S8	STP-8	CD-8	22	
S9	STP-9	CD-9	22	
S9	STP-9	YC-9	22	
S10	STP-10	LS-22	22	
S10	STP-10	CD-10	22	
S10	STP-10	YC-10	22	

FIGURE M
UNIVERSAL OPTNS COMMUNICATIONS WIRING

NOTE 1: FOR INDICATOR WIRING TO SEC. DISC.
SEE ACB WIRING DIAGRAM.

THESE DIAGRAMS ARE FOR BREAKERS
WITH STATIC TRIP III WITH
MODIFIED DIFFERENTIAL TRIP.

STANDARD DRAWING
DO NOT DESTROY, CHANGE OR
ADD MARK NO'S W/O APPROVAL
OF DESIGN ENGINEERING.