


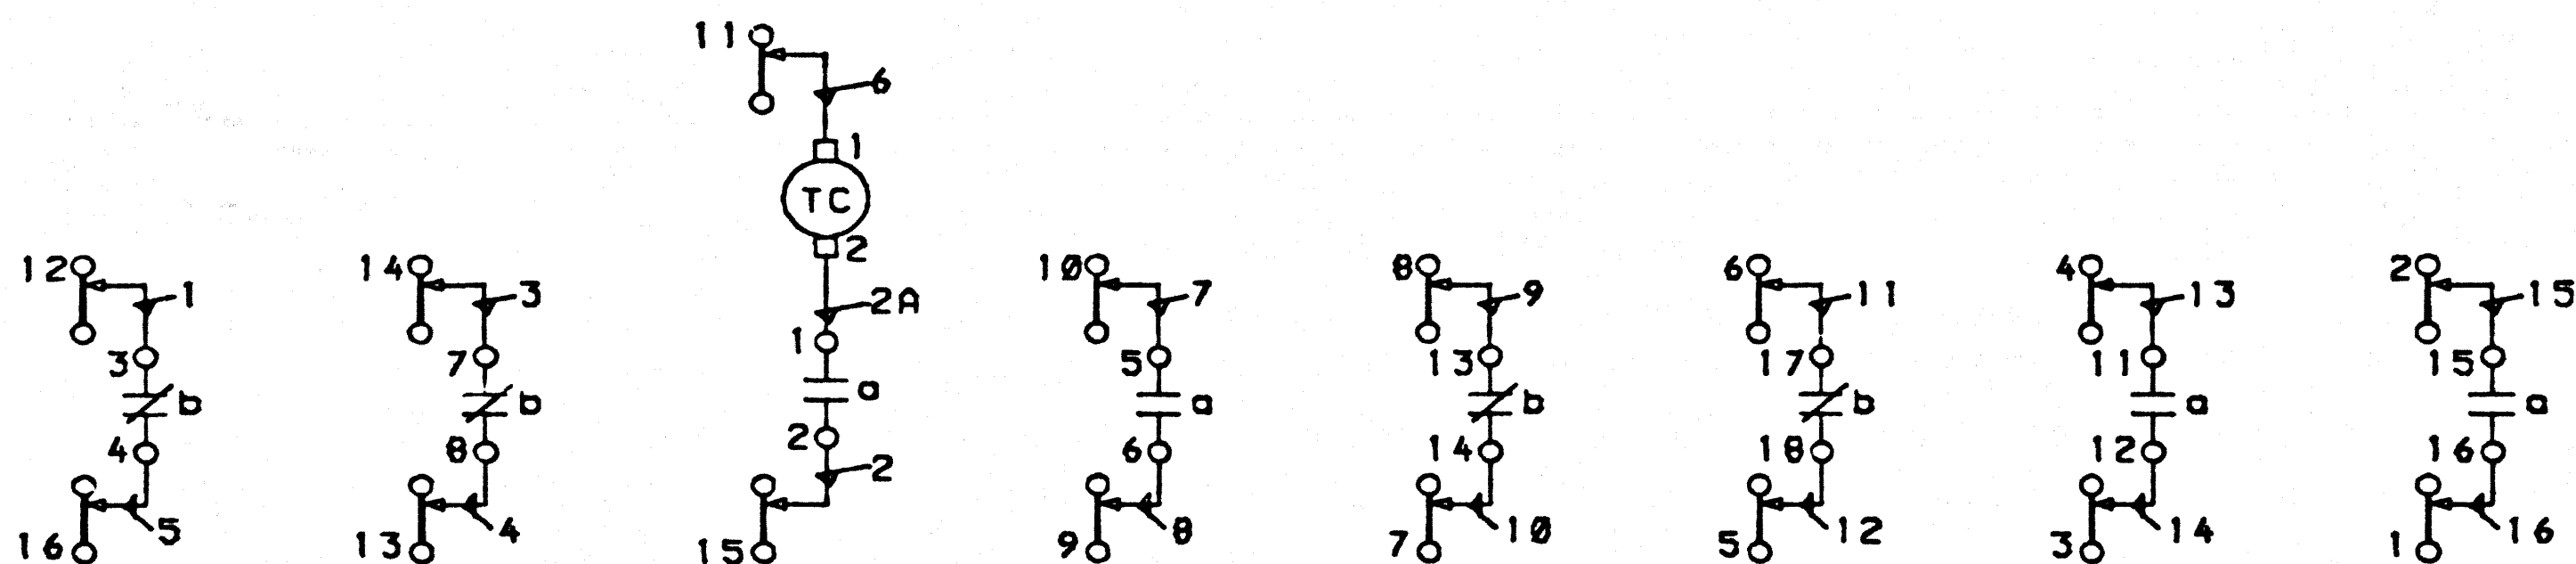


DEVICE LIST



- TC - SHUNT TRIP COIL
- a - AUX. SW.-OPEN WHEN BKR. IS OPEN
- b - AUX. SW.-CLOSED WHEN BKR. IS OPEN
- AL - ALARM DEVICE
- UV - UNDERVOLTAGE TRIP DEVICE COIL
- AS - AUXILIARY SWITCH
- SD - SECONDARY DISCONNECT
- CT - TRIPPING TRANSFORMER
- STD - STATIC TRIP DEVICE

ALL REVISIONS MUST BE MADE ON CAD SYSTEM.

CLASS 'C' WIRING
#14 WIRE SIS. 00-557-206-341
#10 WIRE SIS. 00-557-206-003

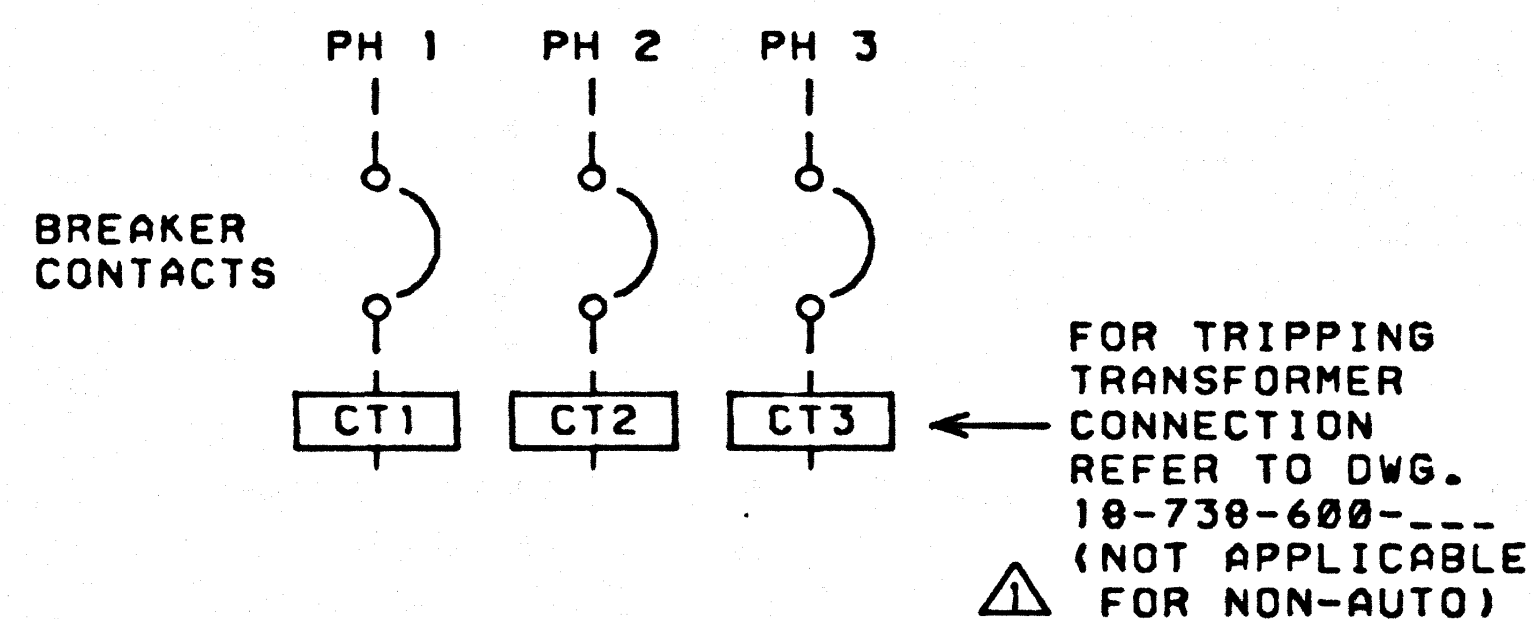

WIRE CHART			
WIRE	TERMINALS		SIZE
1	SD12	AS3	14
2	SD15	AS2	10
2A	AS1	TC2	10
3	SD14	AS7	14
4	SD13	AS0	14
5	SD16	AS4	14
6	SD11	TC1	10
7	SD10	AS5	14
8	SD9	AS6	14
9	SD8	AS13	14
10	SD7	AS14	14
11	SD6	AS17	14
12	SD5	AS10	14
13	SD4	AS11	14
14	SD3	AS12	14
15	SD2	AS15	14
16	SD1	AS16	14

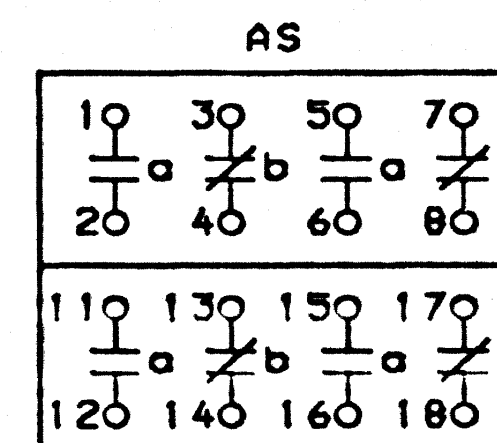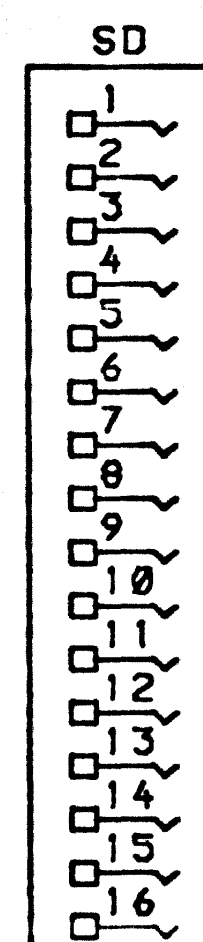

- - SINGLE FASTON TAB, ONE CONNECTION ONLY
- - MULTIPLE CONNECTIONS POSSIBLE

02/12/28/89

ADDED NOTE
ECO LV9001-B1

01/12/08/86

3 WIRE
AUX SW (3a, 4b)
TRIP COIL
8 STAGE AUX SW

CAD MT

DRAWN RJH

CHECK

APVD

PRODUCT TYPE

RL

Siemens Energy & Automation, Inc.

DWG NAME

MANUALLY OPERATED
AIR CIRCUIT BREAKER
WIRING DIAGRAM

SIZE FSCM NO.

B

DWG NO.

18-738-601-474

ISSUE

02

SCALE NTS WT

SHEET 1 OF 1