



Vacuum Limitamp® 2-High, Medium-Voltage Motor Control (CR194)

*Introducing GE's new 2-high
compact or draw-out design*

*5kV 400A stationary vacuum contactor
design*

*2-high stacking with full top/bottom
compartment isolation*

*Bolted frame construction provides an
accurate and simple building platform.*

*Industry's smallest size: 36"W x 30"D x
90"H (optional 40" width available)*

*Roomy, door-in-door low voltage
compartments*


Epoxy insulated main and vertical bus

1200A or 2000A main bus ratings

*Front or rear accessible main bus with
matching line-up to existing Limitamp*


*Available in NEMA 1, 1A, 2 or 12 indoor
enclosures; NEMA 3R outdoor walk-in
or non-walk-in*

UL/CSA approved

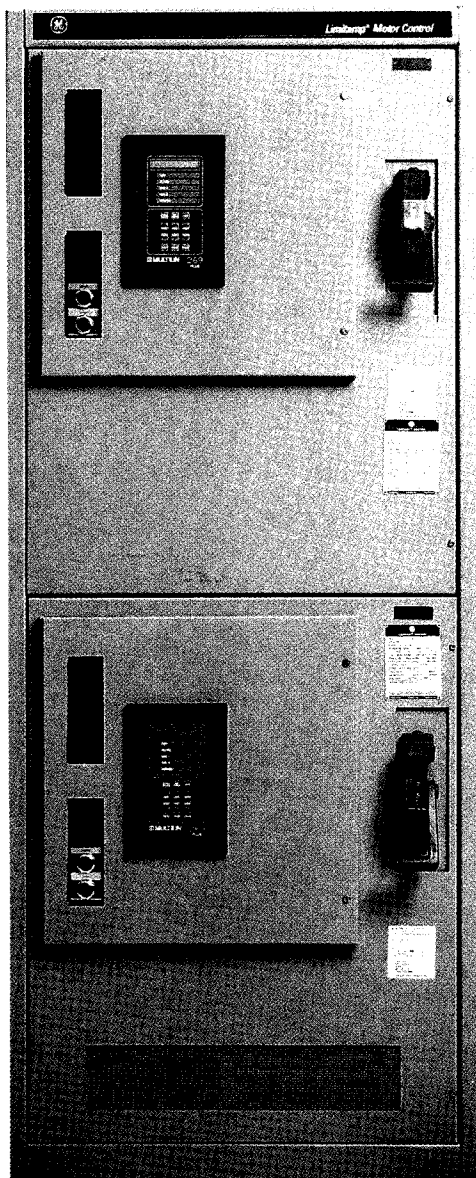

**Now Available in
Both Stationary and
Draw-out Designs**

Low Voltage Compartments

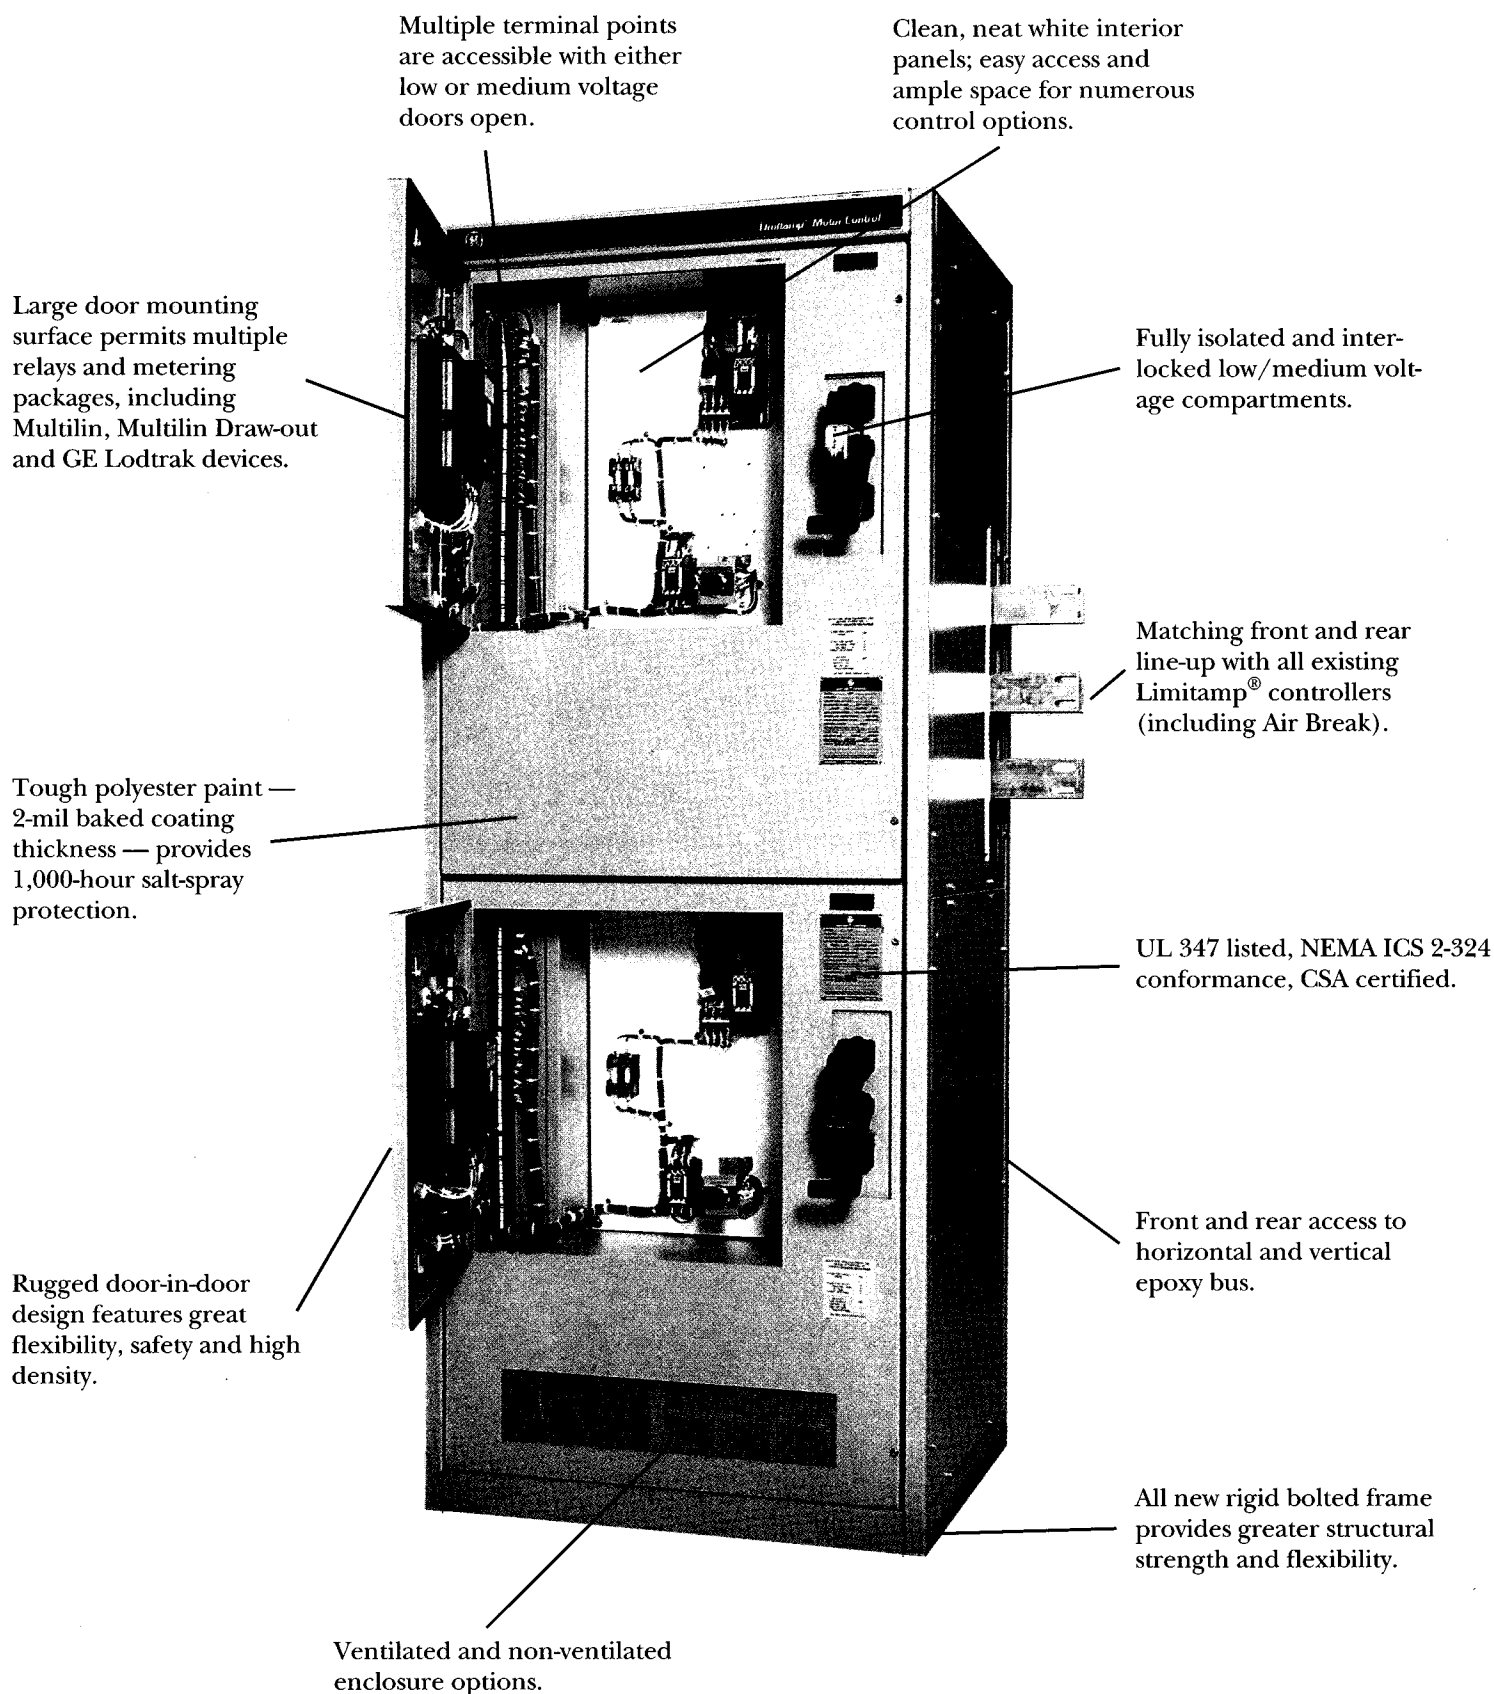

Medium Voltage Compartments

Large field wiring terminal access with fully isolated upper and lower compartments.

Quick make/quick break isolation switch:

- Visible blade with clear on/off indication
- Positive over center, independent action
- Mechanically interlocked with contactor, assuring safe non-load break operation


Fast-acting, high-interrupting current limiting fuses:

- 5kV EJ1 or EJ2
- Reliable bolted design with blown fuse indicator and contactor open lockout
- Clip fuses optional
- Full front access and removal (no special tools required)

Simple draw-out channels supporting removable contacts featuring line and load stab connections.

Industry-proven 400A vacuum contactor featuring:

- Low maintenance, high reliability
- Easy coil access and simple contact wear check without contactor removal
- Light weight, fast & easy change-out if required
- Full interlocking for optimum safety including up to 10 auxiliary contacts

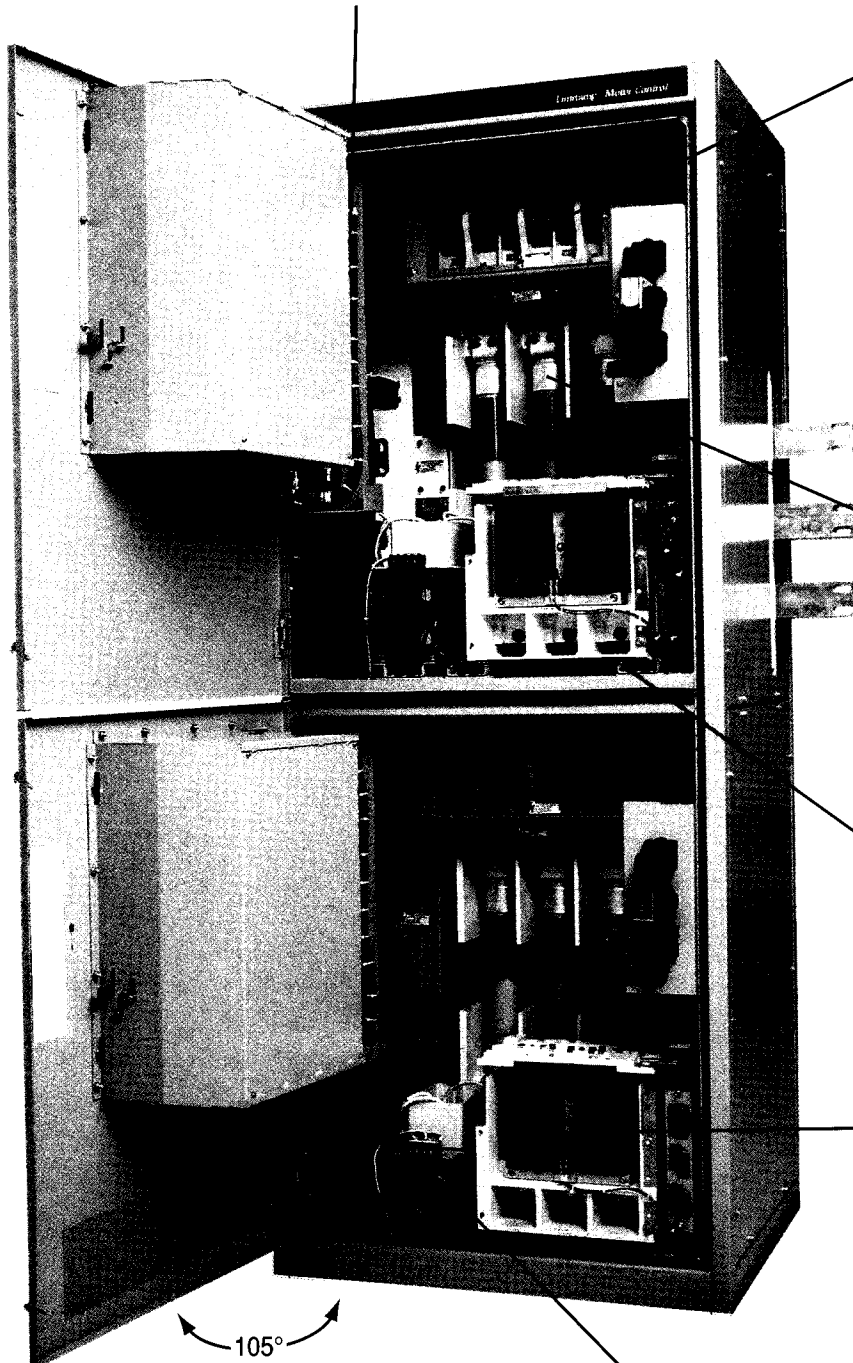

Wide door opening for easy component and wiring access

Front accessible control power transformer (2kVA std., 3kVA opt.) including integral fuse holder.

Key Product Specifications

Main AC Horizontal Bus Ratings

- 1200A or 2000A (1950A non-ventilated)
- 50 KA rms sym short circuit
- Tin or silver plating available
- Epoxy insulation
- Matching line-up with all existing Limitamps® (including Air Break)

Current Ratings (amps)

- Vented: 360 top/400 bottom
- Non-vented: 320 top/320 bottom

Fuse ratings

Class E1 mVA25 at 2.5kV
..... .50 at 5.0kV

Class E2 mVA
2400 volts200
3600 volts300
4160 volts350
4800 volts400

Contactor Ratings - CR193B

Short-time current (amps)	
30 seconds	2400
1 second	6000
Impulse withstand (kV)	60
Dielectric strength (kV) 1 minute	13.25
Switching frequency (ops/hour)	1200
Mechanical life (ops)	2,000,000
Electrical life (ops)	1,000,000
Closing time (max MS)	350
Opening time (max. MS) switched at coil	50
Pick-up voltage (% of rated)	85% max.
Drop out voltage (% of rated)	10%-65%
Control voltage (volts) requires rectification	110/115 AC
Control circuit burden (VA)	
Closing	175
Hold-in	30
Contactor weight	75 lbs. (35 kg)
Standards applicable	UL 347 NEMA ICS 2-32, CSA

References:

Technical brochure GET-6840
Instruction book GEH-6263



GE Electrical Distribution & Control